



SD5 SECURITY & BLAST DOOR

Our SD5 Security Doors are designed to protect extremely high value storage properties from professional attempts at forced entry, regardless of noise, using heavy hand and power tools or explosives.

Security with aesthetics.




DOOR LEAF

- Thickness:** 62mm (xxkg/m³ blade only)
- Material:** 3mm and 4mm sheets of mild steel as standard, wide variety of colours.
- Infill:** Infilled with mineral wool and integral steel strengtheners.
- Construction:** Doorblade manufactured from heavily welded mild steel and constructed with a infilled inner door which is faced with 4mm steel externally and 3mm internally. A total steel armour thickness of 9mm.
- Astragal:** Blade fitted with an anti-jemmy astragal.


DOOR FRAME

- Construction:** High security two part frame system allows for highest security. The first part is fitted to the structure with the second being welded on site to protect the fixing points. Fitted with heavy duty drop-on hinges which only allow the door to be removed once the blade has passed 90 degrees. Large diameter dog bolts are fitted to the frame to prevent the door from being removed if the hinges are attacked.



THRESHOLD

- Standard:** 15mm rebated threshold.
- Optional:** 5mm driveable (DDA compliant).
12.5mm 564A Aluminium (DDA compliant).

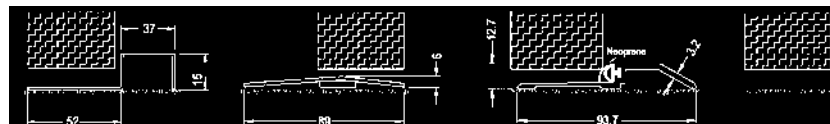

Standard

Driveable
(optional)
Part M compliant

564A
(optional)
Part M compliant

None
(optional)

FINISHES

- Standard:** Because, for strength and attack resistance, the door construction is heavily welded it is not possible to achieve our normal high aesthetic finish. The doors can be completed with a powdercoat finish to any standard BS or RAL finish.

- Optional:** Contact the Sales office for special finishes.

SIZES

- Size:** Doors are custom manufactured in 10mm increments for single openings 690mm to 1390mm and double openings 1290mm to 2600mm, at heights up to 2900mm.

Contact the Sales office for special configurations and finishes.

SECURITY



SD5 SECURITY & BLAST DOOR



SECURE LOCKING

Locking: Claves High Security Multipoint Deadlock providing seven point locking. Lockcase and cylinder protected with anti-drill security. Plus a High Security central sashlock. Alternatively high security multi-point panic hardware for fire escapes.

APPLICATIONS

Duty: Heavy duty applications such as strong-rooms, cash offices and drug stores.
Protection from professional means of attempting forced entry into high value storage areas after penetrating the building facade.
Further the door is suitable for protection against attempted entry by explosives.
Note: All duty recommendations assume the doors are used in conjunction with other comparable levels of security at windows, etc.

TESTING

Tests: SECURITY Tested to the highest level of the Swedish Burglary Test SS 81 73 45
The test involves a determined attack over a period of 30mins. using a selection of hand and power tools including sledge hammer, 500W drill, power saws and angle grinder. (see 'Practical Attack Element of Test for full details'.)
Locks Anti-drill tested to BS EN 1303 Security grade 6.

BLAST SD5 doors have been tested and passed EXR3 of BS EN 13124-2, the Explosion Resistance standard, with explosive blasts using plastic explosives.

SECURITY